


Gas Pressure Regulator RMG 503



PRODUCT INFORMATION

**Serving the Gas Industry
Worldwide**

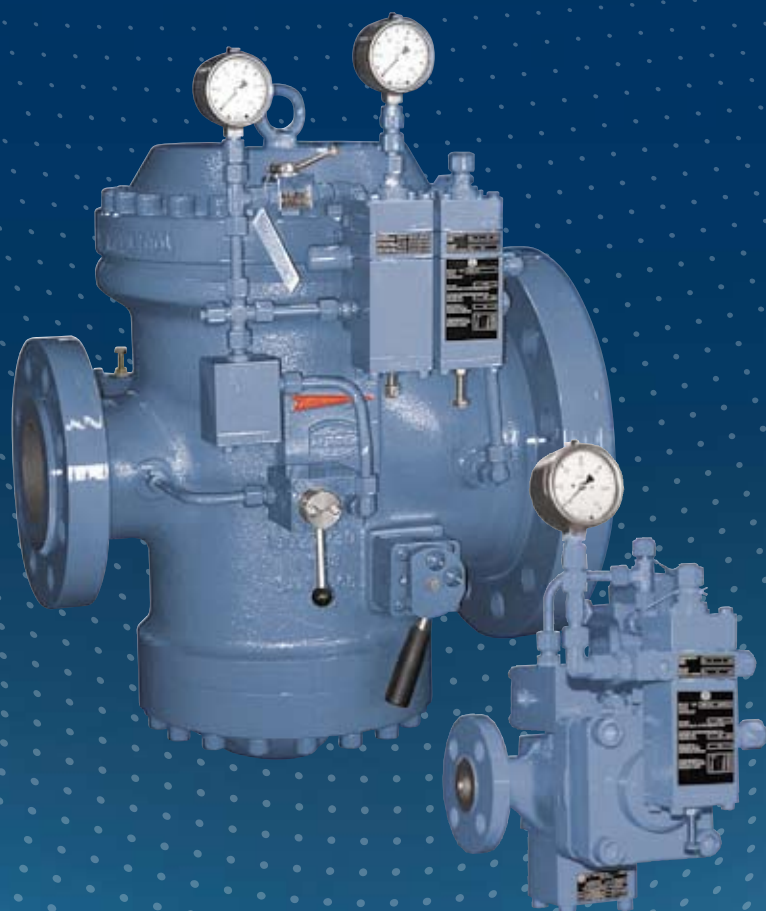

by Honeywell

GAS PRESSURE REGULATOR RMG 503


Application, properties, technical specifications

Application

- Device for local use at power plants and industrial facilities
- Suitable for use with natural gas and all non-aggressive gases

Properties

- Large inlet pressure range
- Diaphragm valve acts as actuator
- Made up of few parts, easy to maintain, and quiet operation
- With integrated safety shut-off valve

TECHNICAL SPECIFICATIONS				
Max. inlet pressure p_{max}		100 bar		
Outlet pressure range W_d optional with pilot RMG 630 in two-stage design, for inlet pressure changes of >15 bar or pilot RMG 640 (one-stage design, used for inlet pressure changes of up to 15 bar)		0.3 to 40 bar 20 to 90 bar (with metal harmonica measuring unit)		
Pressure difference between inlet and outlet	Min. pressure difference	$\Delta p_{min} = 2,0$ bar, $\Delta p_{min} = 4,0$ bar (at DN 25/25)		
	Max. pressure difference	$\Delta p_{max} = 70$ bar		
Nominal width and KG value		DN 25 / 25	KG = 250	m ³ /h
		DN 25 / 50	KG = 350	m ³ /h
		DN 50 / 100	KG = 1400	m ³ /h
		DN 80 / 150	KG = 3600	m ³ /h
		DN 100 / 200	KG = 5500	m ³ /h
		DN 150 / 300	KG = 12000	m ³ /h
Type of connection		DIN PN 40 flange and flanges according to ANSI 150 (DN 25/25 only), ANSI 300, ANSI 600		
Accuracy class and closing pressure category	outlet pressure range W_d		accuracy class	closing pressure category
	with pilot RMG 630			
		0.30 ... 0.50 bar	AC 20	SG 30
		> 0.50 ... 1.00 bar	AC 10	SG 20
		> 1.00 ... 5.00 bar	AC 2.5	SG 10
		> 5.00 ... 90.0 bar	AC 1	SG 5
with pilot RMG 640		0.30 ... 1.00 bar	AC 20*/30	SG 30*/50
		> 1.00 ... 3.00 bar	AC 20	SG 30
		> 2.50 ... 5.00 bar	AC 10	SG 20
		> 5.00 ... 10.0 bar	AC 5	SG 10
		> 10.0 ... 90.0 bar	AC 2.5	SG 10
Closing pressure category		SZ 2,5		
Class II temperature range		-20 °C to +60 °C		
Operation and strength		according to DIN EN 334, DIN EN 14382		
CE mark according to PED				
Ex protection		Since the device is not fitted with potential ignition sources of its own, it is not subject to ATEX 95 regulations (all used electronic accessories meet ATEX requirements).		

*) The lower accuracy class and closing pressure category is valid for inlet pressure changes < 8 bar.

GAS PRESSURE REGULATOR RMG 503

Application, properties, technical specifications

MATERIALS			
Actuator unit housing	Cast steel	SAV switching device	Steel, brass, aluminum wrought alloy
Interior parts of actuator unit	Steel, aluminum alloys	SAV controller	Aluminum wrought alloys
Controller	aluminum alloys		
Diaphragms	Rubber plastics (NBR, ECO)		
Gaskets	Rubber plastics (NBR)		

ADJUSTMENT RANGES OF SAV CONTROL UNITS USED FOR ACTUATORS WITH INTEGRATED SAVS (DN 50/100 TO DN 100/200)								
Control unit	Setpoint spring			Upper response pressure p _{dso}		Lower response pressure p _{dsu}		Response pressure group **
	No.	Color	Wire ø in mm	Adjustment range W _{dso} (bar)	Smallest difference between response pressure and normal operating pressure* Δp _{wo} (bar)	Adjustment range W _{dsu} (bar)	Smallest difference between response pressure and normal operating pressure* Δp _{wu} (bar)	
K1a	1	yellow	2,50	0,05 ... 0,10	0,030			10 / 5,0
	2	light red	3,20	0,08 ... 0,25	0,050			10 / 5,0
	3	dark red	3,60	0,20 ... 0,50	0,100			5 / 2,5
	4	white	4,75	0,40 ... 1,50	0,250			5 / 2,5
	5	light blue	1,10			0,010 ... 0,015	0,012	20
	6	white	1,20			0,014 ... 0,040	0,030	10 / 5,0
	7	black	1,40			0,035 ... 0,120	0,060	5
K2a/1	1	light red	3,20	0,40 ... 0,80	0,100			10 / 5,0
	2	dark red	3,60	0,60 ... 1,60	0,200			10 / 5,0
	3	white	4,75	1,50 ... 4,50	0,300			5 / 2,5
	4	light blue	1,10			0,060 ... 0,150	0,050	10 / 5,0
	5	black	1,40			0,120 ... 0,400	0,080	5
K2a/2	3	white	4,75	2,50 ... 8,00	0,500			10 / 5,0
	6	red	2,25			0,800 ... 2,200	0,400	15 / 5,0
K10a	2	light red	3,20	0,08 ... 0,250	0,050			10 / 5,0
	3	dark red	3,60	0,20 ... 0,500	0,100			5 / 2,5
	4	white	4,75	0,40 ... 1,500	0,250			5 / 2,5
	6	white	1,20			0,010 ... 0,040	0,030	10 / 5,0
	7	black	1,40			0,035 ... 0,120	0,060	5
K11a/1	1	light red	3,20	0,4 ... 0,8	0,100			10 / 5,0
	2	dark red	3,60	0,6 ... 1,6	0,200			10 / 5,0
	3	white	4,75	1,5 ... 4,5	0,300			5 / 2,5
	4	light blue	1,10			0,060 ... 0,150	0,050	10 / 5,0
	5	black	1,40			0,120 ... 0,400	0,080	5
	6	red	2,25			0,350 ... 1,000	0,100	5
K11a/2	3	white	4,75	2,5 ... 8,0	0,500			10 / 5,0
	6	red	2,25			0,800 ... 2,200	0,400	10 / 5,0
K16	0	***blue	3,20	0,8 ... 1,5	0,100			2,5
	1	black	4,50	1,0 ... 5,0	0,200			2,5 / 1,0
	2	gray	5,00	2,0 ... 10	0,400			1
	3	brown	6,30	5,0 ... 20	0,800			1
	4	red	7,0	10 ... 40	1,200			1
K17	2	gray	5,00			2 ... 10	0,400	5
	3	brown	6,30			5 ... 20	0,800	5
	4	red	7,00			10 ... 40	1,200	5
K18	1		9,00	20 ... 90	1,500			1

*) Please note: When using control units for both the upper and the lower response pressure, make sure that the difference between the two setpoints p_{dso} and p_{dsu} is at least 10 % greater than the sum of the two values Δp_{wo} and Δp_{wu}.

**) The higher AG group applies to the first half, while the lower AG group applies to the second half the adjustment range.

***) only DN 25/25

GAS PRESSURE REGULATOR RMG 503

Setup and mode of operation

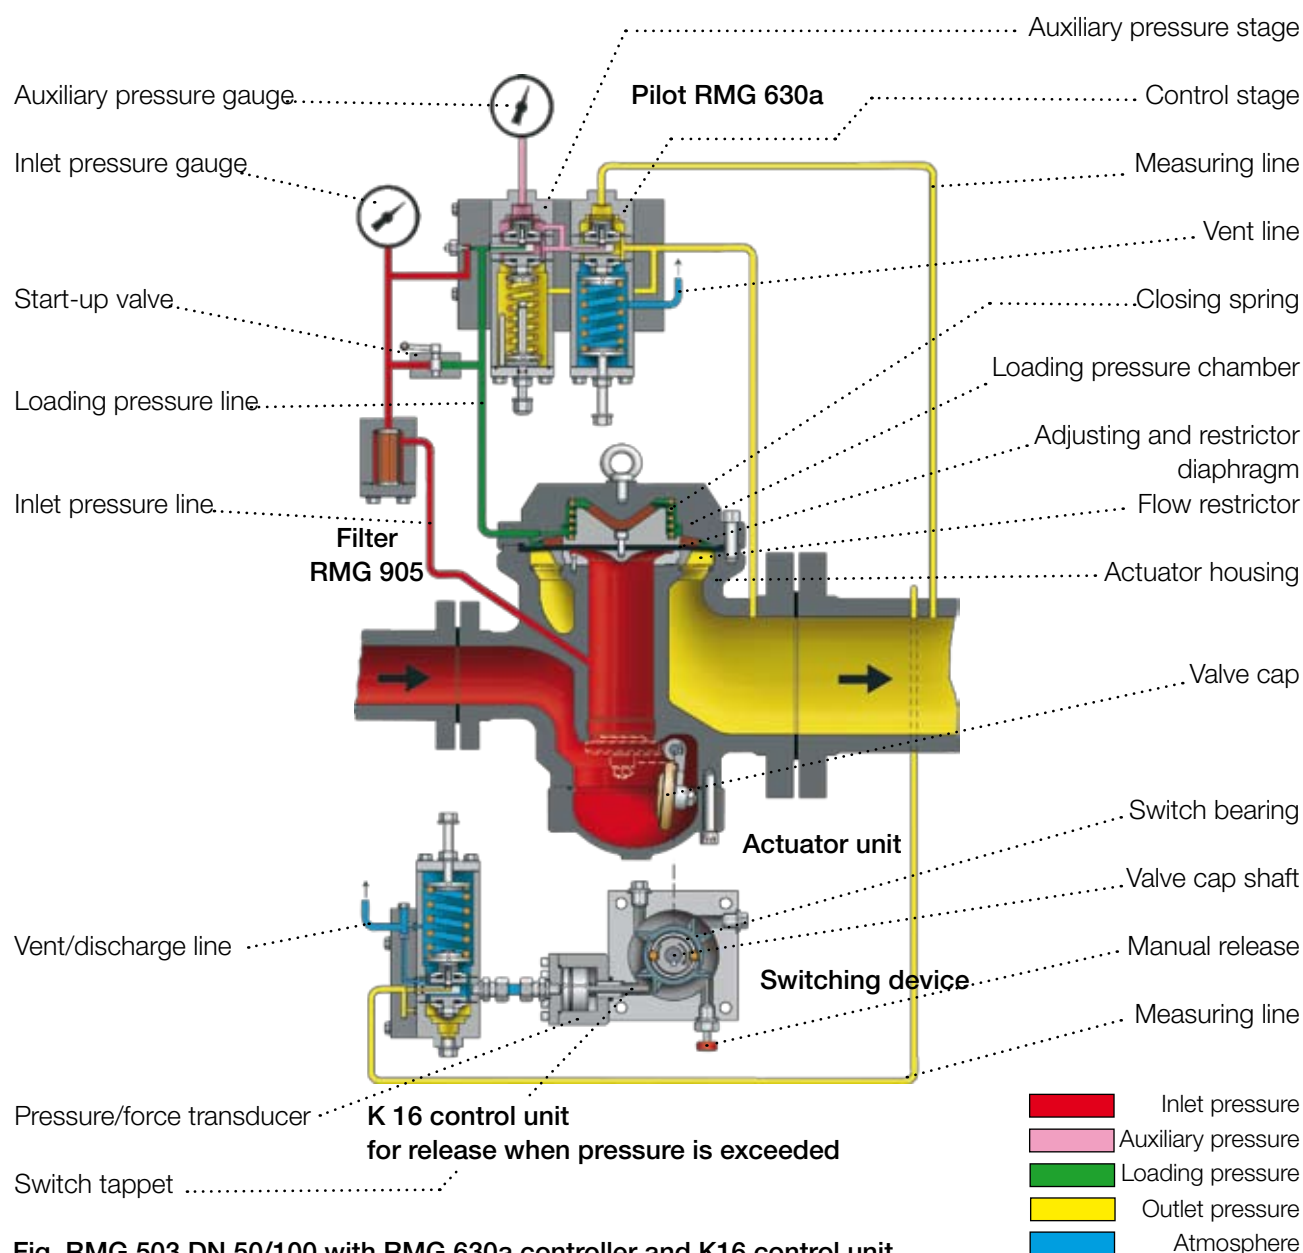


Fig. RMG 503 DN 50/100 with RMG 630a controller and K16 control unit

The gas pressure regulator RMG 503 unit is used to keep the outlet pressure of a gaseous medium at a constant level independent of any disturbance variables such as changes in inlet and/or outlet pressure throughout the controlled system.

The RMG 503 is composed of the actuator unit and the functional units "pilot" and "safety shut-off valve (SAV)." A fine filter is switched in front of the pilot to protect it against dirt.

Thanks to the fact that it is composed of only a few parts, the actuator unit is particularly easy to maintain: its only wearing part, the restrictor diaphragm, can be subjected to a quick inspection by simply removing the upper part of the housing without the need to remove the actuator housing from the controlled system.

The valve cap gasket (SAV) can also be serviced without the need to remove the unit from the system.

The actuator is designed as a diaphragm valve. The diaphragm supports itself on the flow restrictor, which is fitted with bores. An all-around sealing edge is located in front of the bores. A closing spring generates the necessary sealing force for zero shut-off.

In contrast to a device operating with a valve disk/actuator, this standard version achieves a noise reduction of 10 to 15 dB(A) thanks to its integrated gas flow divider inside the flow restrictor. Installing additional noise-reducing components (nominal widths of DN 25/50 or more) below the flow restrictor will lower the noise level even further.

However, a KG value reduced by approx. 10 % is to be expected. The outlet pressure you want to control is fed to the controller via the measuring line. The double diaphragm system inside the controller captures the actual value of the outlet pressure as a force acting on the measuring diaphragm and compares it to the force of the setpoint spring, which serves as a set point. If this comparison reveals any deviations from the controlled pressure, the device will adjust the set pressure by changing the opening position of the restrictor diaphragm in an effort to bring the outlet pressure (actual value) in line with the set point. Thanks to its use of a diaphragm construction as an actuator, the RMG 503 manages to operate soundly even when handling only low flow rates. The device will seal tightly when consumption is zero.

The gas pressure control unit will be equipped with a start-up valve for nominal widths of DN 25/50 or greater to allow the device to faster equalize the inlet pressure acting on the restrictor diaphragm.

The tried and tested RMG 711 system or, for nominal widths of DN 25/25 or greater, the SAV RMG 704 function as safety shut-off valves (SAV). The SAV will close every time the pressure exceeds or falls below the set response pressure. For a functional description of the SAV and information on how to adjust it and reset it, see the technical product information on the RMG devices 703/704/711, the associated operating and maintenance instructions of RMG devices 703/711 as well as the brochure sheets of the corresponding control units.

Fig. RMG 503 DN 25/25 with RMG 640-1 controller (view of the control unit)




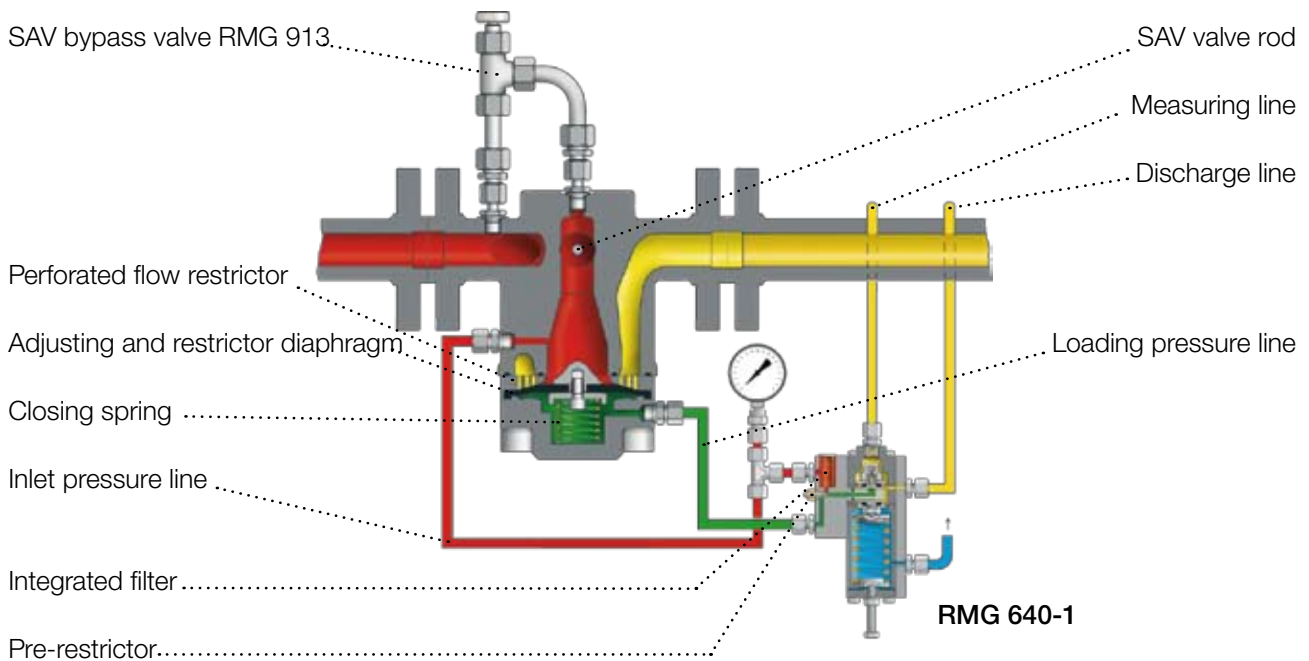


Fig. RMG 503 DN 25/25 with K16 control unit (view of the SAV unit)

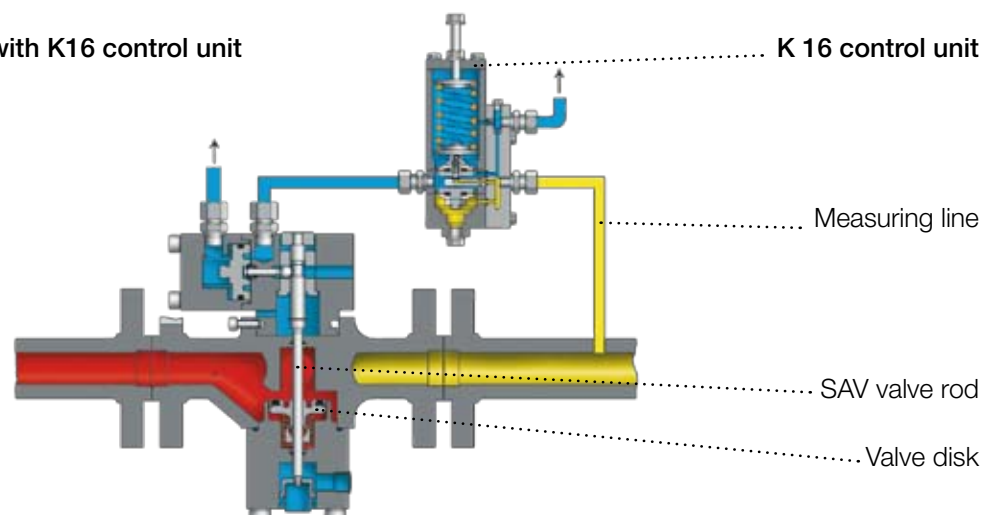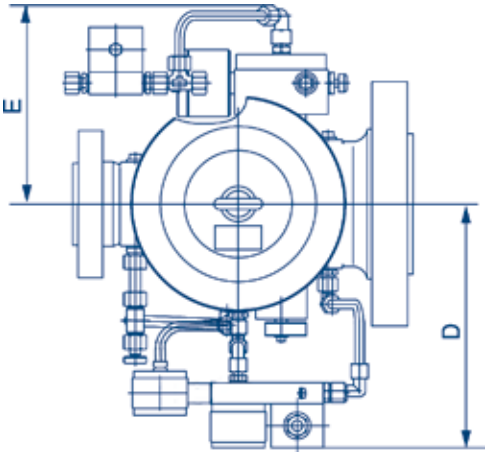

GAS PRESSURE REGULATOR RMG 503

Dimensions, weights, and connectors

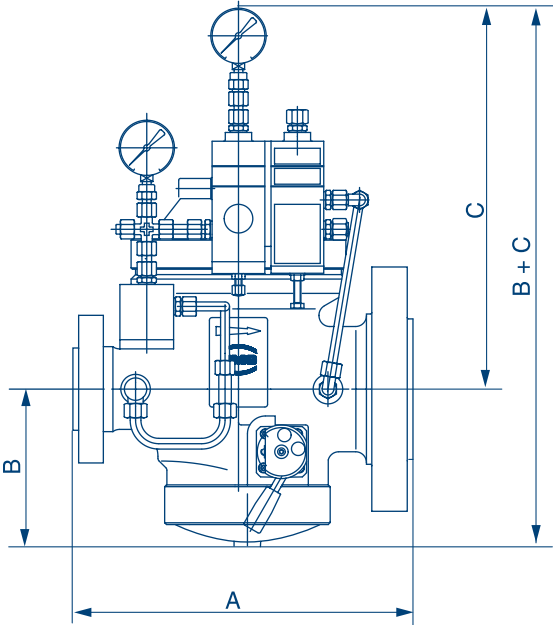

DIMENSIONS					
Nominal width	Dimensions in mm				
Inlet/outlet	A	B	C	D	E
25 / 25	230	130	300	250	200
25 / 50	340	150	490	300	265
50 / 100	380	190	490	300	265
80 / 150	550	310	500	350	330
100 / 200	550	310	500	350	330
150 / 300	750	470	640	430	390

WEIGHTS	
Nominal width	
Inlet/outlet	Weights in kg
25 / 25	26
25 / 50	90
50 / 100	100
80 / 150	270
100 / 200	330
150 / 300	850

CONNECTIONS			
Pilot		SAV	
Inlet pressure line	E 10	Measuring line	E 12
Loading pressure line	E 10	Vent/	E 12
Measuring line	E 12	discharge line	
Discharge line	E 12		
Vent line	E 12		

Example

503 – 50/100 – K 16 / E2 / HA / F – 630a 2 – So

Type	Nominal width (inlet/outlet)	Control unit	Release unit	Remote control	Type of controller	Setpoint spring	Special design
NOMINAL WIDTH							
DN							
25 / 25							
25 / 50							
50 / 100							
80 / 150							
100 / 200							
150 / 300							
ADJUSTMENT RANGE IN BAR							
W _{do}	W _{du}			Control unit			
0,05 ... 1,50	0,01 ... 0,12	only DN 25/25		K 1a			
0,40 ... 4,50	0,06 ... 0,40	only DN 25/25		K 2a/1			
2,50 ... 8,00	0,80... 2,20	only DN 25/25		K 2a/2			
0,08 ... 1,50	0,01 ... 0,12	from DN 25/50		K 10a			
0,40 ... 4,50	0,06 ... 1,00	from DN 25/50		K 11a/1			
2,50 ... 8,00	0,80 ... 2,20	from DN 25/50		K 11a/2			
1,00 ... 40,0				K 16			
	2,00 ... 40,0			K 17			
20,0 ... 90,0				K 18			
RELEASE							
Current input				E1			
Power failure (DN 25/50 or greater)				E2			
Manual release				HA			
REMOTE CONTROL							
Electrical remote control of the valve position “CLOSE”				F			
PILOT TYPE							
Pilot				RMG 630a RMG 640 RMG 640-1			
OUTLET PRESSURE RANGE IN BAR							
W _d				Setpoint spring			
0,30 ... 1,00				1			
1,00 ... 5,00				2			
2,00 ... 10,0				3			
5,00 ... 20,0				4			
10,0 ... 40,0				5			
20,0 ... 90,0				Metal harmonica measuring unit			
SPECIAL DESIGN (TO BE SPECIFIED IN MORE DETAIL)							
				So			

For More Information

To learn more about RMG's advanced gas solutions, contact your RMG account manager or visit www.rmg.com

GERMANY

Honeywell Process Solutions

RMG Regel + Messtechnik GmbH
Osterholzstrasse 45
34123 Kassel, Germany
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-107

Honeywell Process Solutions

RMG Messtechnik GmbH
Otto-Hahn-Strasse 5
35510 Butzbach, Germany
Tel: +49 (0)6033 897-0
Fax: +49 (0)6033 897-130

Honeywell Process Solutions

RMG Gaselan Regel + Messtechnik GmbH
Julius-Pintsch-Ring 3
15517 Fürstenwalde, Germany
Tel: +49 (0)3361 356-60
Fax: +49 (0)3361 356-836

Honeywell Process Solutions

WÄGA Wärme-Gastechnik GmbH
Osterholzstrasse 45
34123 Kassel, Germany
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-207

POLAND

Honeywell Process Solutions

Gazomet Sp. z o.o.
ul. Sarnowska 2
63-900 Rawicz, Poland
Tel: +48 (0)65 5462401
Fax: +48 (0)65 5462408

ENGLAND

Honeywell Process Solutions

Bryan Donkin RMG Gas Controls Ltd.
Enterprise Drive, Holmewood
Chesterfield S42 5UZ, England
Tel: +44 (0)1246 501-501
Fax: +44 (0)1246 501-500

CANADA

Honeywell Process Solutions

Bryan Donkin RMG Canada Ltd.
50 Clarke Street South, Woodstock
Ontario N4S 0A8, Canada
Tel: +1 (0)519 5398531
Fax: +1 (0)519 5373339

USA

Honeywell Process Solutions

Mercury Instruments LLC
3940 Virginia Avenue
Cincinnati, Ohio 45227, USA
Tel: +1 (0)513 272-1111
Fax: +1 (0)513 272-0211

TURKEY

Honeywell Process Solutions

RMG GAZ KONT. SIS. ITH. IHR. LTD. STI.
Birlik Sanayi Sitesi, 6.
Cd. 62. Sokak No: 7-8-9-10
TR - Sasmaz / Ankara, Turkey
Tel: +90 (0)312 27810-80
Fax: +90 (0)312 27828-23

